

# TECHNICAL DATA SHEET



Document No: TDS.G1200



Revision No: 00

## G1200 Stop Bead

|                           |   |
|---------------------------|---|
| ■ Product Range           | Plaster Profiles                              |
| ■ Applications            | Interior Plaster                              |
| ■ Product Type            | Stop Bead<br>Perforated                       |
| ■ Plaster Thickness       | 3 mm  |
| ■ Material                | Galvanized Sheet Steel<br>DX51D+Z to EN 10142 |
| ■ Coating /Finish /Colour | 275 g/m <sup>2</sup> Zinc Coating             |
| ■ Material Thickness      | 0,50 mm                                       |
| ■ Wings /Length           | 3x26 mm                                       |
| ■ Standards               | EN 13658-1                                    |
| ■ Reaction to Fire        | Class A1                                      |
| ■ DOP Reference           | DOP.G1200                                     |
| ■ Length Options          | 250, 260, 270, 280, 300 cm                    |
| ■ Art Nr.                 | G12005500<br>G12005501                        |
| ■ Packaging               | 25 pcs/bun<br>50 pcs/cts                      |

### Remarks:

This technical data sheet replaces all previous versions. Işık reserves the right to modify products without prior notice. Please rely on the application assembly and storage guidelines.

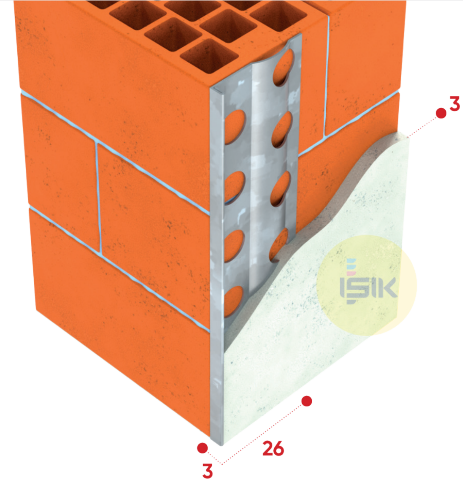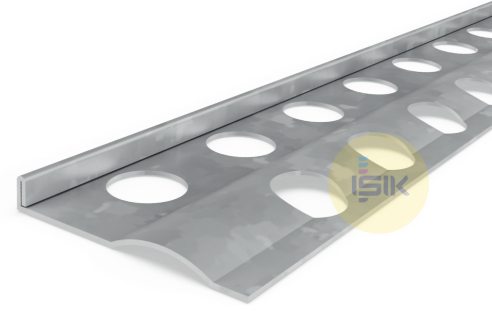

### MANUFACTURER:

Gebze Plastikçiler OSB, Atatürk Bulvarı 11.  
Cad. No:9 Gebze 41400, Kocaeli - Türkiye  
T: +90 262 502 16 60  
isikgroup.com