

PRODUCT CATALOGUE | 2024



THERMAL INSULATION
SYSTEMS



INTERNAL
PLASTERING



EXTERNAL
RENDERING



DRY
LINING

Table of Contents

02 | **Işık Group** at a glance

05 | Brand spotlight: **Lenix**


11 | **Dry lining** beads

29 | **Internal plaster** beads

42 | **External render** beads

47 | **uPVC** beads for External & Internal use

57 | **Thermal insulation** beads

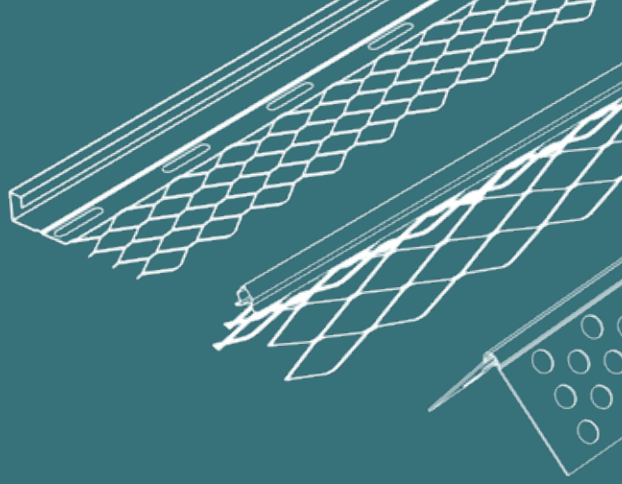

Manufacturer of Building Finishing Beads



**Efforts for Better
9.000 sqm plant,**

Gebze, Kocaeli | TÜRKİYE

Reliable Skilled Manufacturer

Crafting high-quality beads with the utmost precision and care, using only the finest materials and manufacturing techniques, just as we promise to our partners.

Loyal Partner

With over half a century of experience, we recognize the importance of the customer, mutual trust and enduring partnerships.

Good Quality & Service Provider

We embody quality in all processes and materials, strive for on-time delivery, understand customer needs, offer timely responses, and resolve complaints, all exceeding expectations.



8.000
tons of
PVC Extrusion



8.000
tons of
Metal Roll Forming



60.000.000
meters of
Mesh Beads



Sustainability

Our products are made with an effort to achieve sustainability and to offer builders quality products that will last the lifetime of their projects.

Over 99% of our punch-outs is recycled into top-quality finished goods.

Modern sustainable construction must consider resiliency. uPVC beads will never rust, so they'll last the life of your building – excellent for seafront hotels and buildings.



Offering an Extensive Variety of Beads for Finishing



Dry lining

In accordance to EN 14353: Metal beads and feature profiles for use with gypsum plasterboards - Definitions, requirements and test methods.



Internal plastering

In accordance to EN 13658-1: 2005 Metal lath and beads. Definitions, requirements and test methods Part 1: Internal plastering.



External rendering

In accordance to EN 13658-2: 2005 Metal lath and beads. Definitions, requirements and test methods Part 2: External rendering.




Thermal insulation systems

Designed to complement ETICS, EIFS and EWI systems.

Compliance and Quality Assurance

Lenix products are produced exclusively with materials that comply with EN standards and feature CE marking, ensuring they meet all relevant standards.



Galvanised Steel

Manufactured with DX51D+Z galvanised steel strips with zinc coating in accordance to EN 10346. Z275 Zinc coating of 275 g/m² on both sides. Meets EN 13658 parts 1&2 and EN 14353 applications. Z100 Zinc coating of 100 g/m² on both sides. Meets EN 14353 applications.

Application Areas:

- Suitable for interior applications.
- Not suitable for external applications unless secondary protection against corrosion is provided.
- Not permitted for areas exposed to high moisture and damp after application. (houses in wooded areas, wet rooms, swimming pools and domestic bathrooms etc.)

Compatibility:

- Suitable for lime, cement, lime-cement or gypsum based plaster applications.

Installation:

- Should be fixed with plaster or render dabs. Adhesive mortars with set accelerators containing chlorides are not suitable for fixing galvanised profiles.
- Not resistant to corrosion when using top coats of less than 3mm depth in exterior areas.
- Should not come into contact with aluminium or stainless steel profiles.
- Cut with hand plate shears across the wings and a fine toothed saw across bead noses.
- Should be fixed in accordance with embedding the bead's wings into the plaster.



Galvanised Steel with uPVC Nose

Manufactured with DX51D+Z galvanised steel strips with zinc coating of 275 g/m² on both sides in accordance to EN 10346 and protective uPVC nose. uPVC nose adds protection and a maintenance free finish.

Application Areas:


- Suitable for exterior applications and in conditions with high moisture and damp. (houses in wooded areas, bathrooms, etc.)
- Not suitable for exposed coastal locations or corrosive environments.

Compatibility:

- Suitable for lime or cement based renders, scratch renders, pasty finishing coats.

Installation:

- Should be mechanically fixed with stainless clout nails or with cement based mortar, no plaster.
- May not be plastered over. uPVC nose must be cleaned off immediately after plastering.
- Take off nails eventually used for fixing of the profiles before plastering.
- Cut with hand plate shears across the wings and a fine toothed saw across bead noses.



Aluminium Alloy

Manufactured with natural aluminium strips in accordance to EN 485 and EN 573.

Application Areas:

- Suitable for interior applications and thermal insulation systems.
- Not suitable for external applications unless made from white powder-coated aluminium which is suitable for use with mineral render systems and with epoxy, silicone or silicate render systems.

Compatibility:

- Suitable for gypsum and synthetic resin plaster applications.
- Not suitable for cement and lime-based plasters unless coated with base coating.

Installation:

- Should be fixed with plaster in the same quality as the base coat.
- Cut with hand plate shears across the wings and a fine toothed saw across bead noses.
- Never with a blade.



uPVC

Extruded with impact resistant, %0 recycled content and high quality rigid uPVC.

- Economical alternative to stainless steel for external applications.
- Superior corrosion resistance unlike galvanized beads.
- Unsharp edges prevent injuries.
- Convenient, easy to cut lengths on site.
- Light and easy to transport.
- Resistant to breakage.

Application Areas:

- Precise solution for interior areas exposed to high moisture and damp after application. (houses in wooded areas, wet rooms, swimming pools and domestic bathrooms etc.)
- Suitable for exposed coastal locations or corrosive environments.

Compatibility:

- Suitable for external applications with appropriate cement based renders.

Installation:

- Should be fixed with plaster in interior applications.
- Should be fixed with cement based adhesive mortar dabs in exterior applications.
- Cut using a fine-toothed hacksaw across bead noses.



uPVC with Glass Fibre Mesh

Extruded with impact resistant, %0 recycled content, high quality rigid uPVC and reinforcement alkali-resistant glass fibre mesh.

- ETAG 004 certified 145 g/m² reinforcement alkali-resistant E-glass fibre mesh.
- High quality 145, 110, 75 g/m² reinforcement alkali-resistant glass fibre mesh.
- Strong adhesion of bead and glass fibre mesh with transparent hot-melt glue.

Application Areas:

- Suitable for ETICS, EWI and EIFS applications.

Installation:

- Should be pushed into the first base coat layer.
- Cut using a fine-toothed hacksaw across bead noses.

Reliable Packaging and in-house Pallet Production

Lenix packaging are designed to protect and preserve the quality of our products during transport and storage.

Lenix pallets are made;

* We understand the importance of packaging in ensuring that our products reach our customers in perfect condition.

** Lenix packaging is a testament to our commitment to quality and attention to detail.

NO:1

Wooden pallet
W:77cm H:81cm

Pallet for Galvanised, Aluminium and uPVC Beads.
Orders should be placed as 3 pallets or multiples of 3.



NO:2

Wooden pallet
W:77cm H:132cm

Pallet for uPVC beads with mesh in cartons & steel cardboard boxes.
Orders should be placed as 3 pallets or multiples of 3.



NO:3

Wooden pallet
W:115cm H:132cm

Pallet for uPVC beads with mesh in cartons or foil bags
Orders should be placed as 2 pallets or multiples of 2.



Environmentally Friendly Packaging Materials



Bundle (bun)



Cardboard angleboard (cba)



Carton (ctn)



Shrink film (shf)

Go Green!




**DRY LINING
BEADS**

B30



Mini Mesh Bead

30mm wing, 3-4mm plaster depth

CE
EN14353

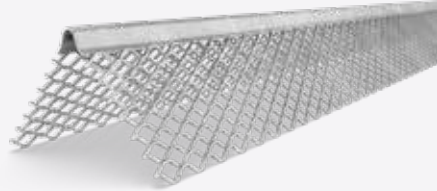

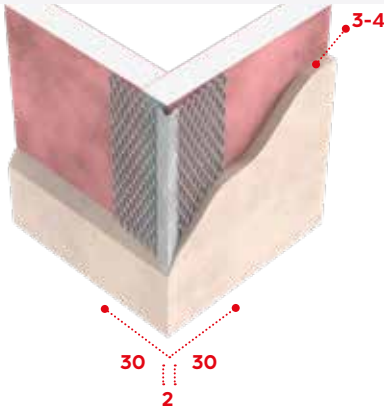

- Aluzinc
- AZ150 g/m²
- 0.40mm
- EN 14353



- Metal corner bead designed to provide a straight and true reinforced corner for thin coat plaster and drywall applications.
- The fine mini-mesh wings allow for excellent bonding of thin coat plaster or drywall finishing compound to the substrate.
- Internal use only.

| Lenix B30 | |
|-----------|-------|
| 1084 | 3-4mm |

| Length -m- | |
|------------|-----|
| 2.7 | 3.0 |

| Product Code |  |  |
|--------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| | Pcs / Bun | Pack / Pallet |
| 1084 | 50 | 80 |





Other lengths between 2.0m and 3.0m available on request. ■

E27 Mini Mesh Bead

27mm wing, 3-4mm plaster depth

CE
EN14353

- Galvanised Steel
- 2275 g/m²
- 0.40mm
- EN 14353

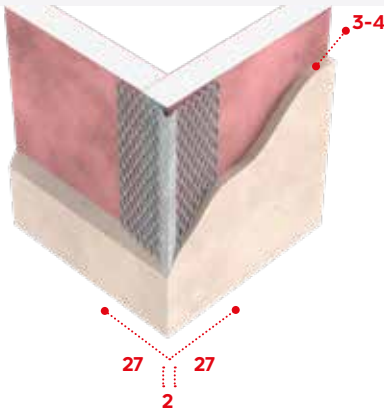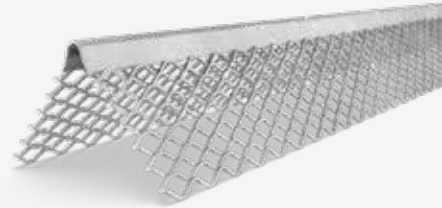

- Metal corner bead designed to provide a straight and true reinforced corner for thin coat plaster and drywall applications.
- The fine mini-mesh wings allow for excellent bonding of thin coat plaster or drywall finishing compound to the substrate.
- Internal use only.

Lenix E27

1087 3-4mm

Length -m-

2.4 2.7 3.0

Product Code

1087



Pcs / Bun

50



Pack / Pallet

80

■ Other lengths between 2.0m and 3.0m available on request.

E22


Thin Coat Bead

22mm wing, 3mm plaster depth

CE
EN14353





- Galvanised Steel
- Z275 g/m²
- 0.40mm
- EN 14353

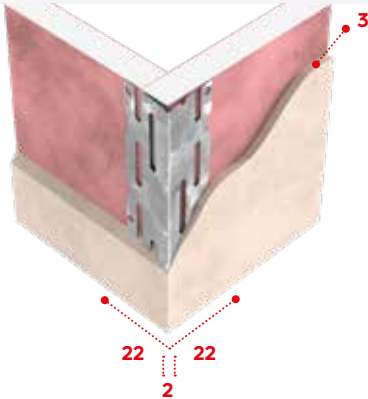

- Metal corner bead designed to provide a straight and true reinforced corner for thin coat plaster and drywall applications.
- The perforated wings allow for superior plaster key.
- Use on plasterboard or aerated blocks.
- Internal use only.

| Lenix E22 | |
|-----------|-----|
| 1086 | 3mm |

| Length -m- | | |
|------------|-----|-----|
| 2.4 | 2.7 | 3.0 |

| Product Code |  |  |
|--------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| | Pcs / Cba | Pack / Pallet |
| 1086 | 50 | 50 |



For Downloads



Other lengths between 2.0m and 3.0m available on request. ■

E18 Thin Coat Bead

22mm wing, 3mm plaster depth

CE
EN14353

- Galvanised Steel
- 2275 g/m²
- 0.40
- EN 14353

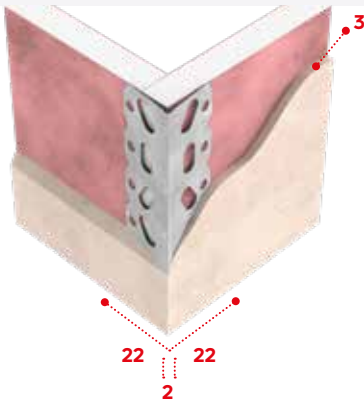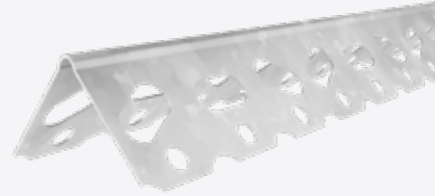

- Metal corner bead designed to provide a straight and true reinforced corner for thin coat plaster and drywall applications.
- The perforated wings allow for superior plaster key.
- Use on plasterboard or aerated blocks.
- Internal use only.

Lenix E22

2550 0.40mm

Length -m-

2.4 2.7 3.0

Product Code

2550



Pcs / Cba

50



Pack / Pallet

50



■ Other lengths between 2.0m and 3.0m available on request.

I30 Drywall Corner Bead

30mm knurled wing, drywall finish

CE
EN14353

- Galvanised Steel
- Z100 g/m²
- 0.40mm
- EN 14353

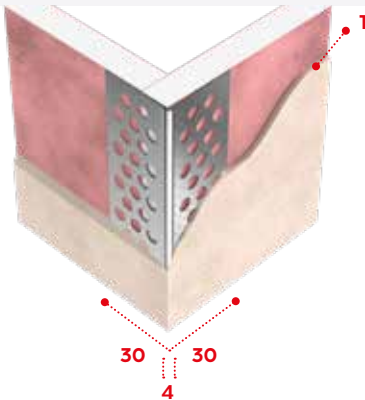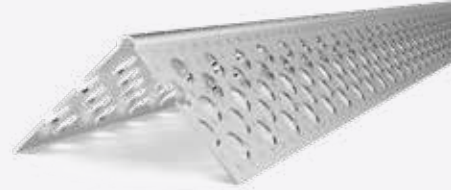

- Metal corner bead for drywall finishing.
- Provides a high-quality finish and protection at drywall corners.
- Knurled & perforated wings for superior joint compound adhesion.
- Internal use only.

Lenix I30

1054 1mm

Length -m-

2.8 3.0

Product Code

1054



Pcs / Bun

25



Pack / Pallet

90

■ Other lengths between 2.0m and 3.0m available on request.



I30-A


Drywall Arch Bead

30mm knurled wing, drywall finish

CE
EN14353



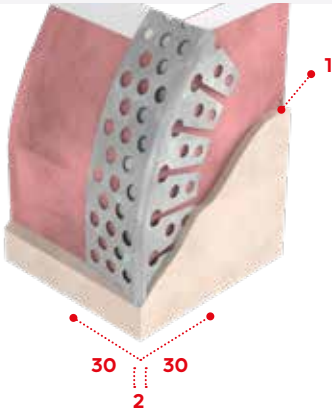

- Galvanised Steel
- Z100 g/m²
- 0.40mm
- EN 14353



- Metal arch corner bead for drywall finishing.
- Provides a high-quality finish and protection at drywall arches.
- Knurled & perforated wings for superior joint compound adhesion.
- Internal use only.

| Lenix I30-A | |
|-------------|-----|
| 1056 | 1mm |

| Length -m- | |
|------------|-----|
| 2.8 | 3.0 |

| Product Code |  |  |
|--------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| | Pcs / Bun | Pack / Pallet |
| 1056 | 25 | 90 |



For Downloads

Other lengths between 2.0m and 3.0m available on request. ■


I30-VA Drywall Corner Bead

Variable angle, 30mm wing, 1mm plaster finish

CE
EN14353



- Galvanised Steel
- Z100 g/m²
- 0.40mm
- EN 14353

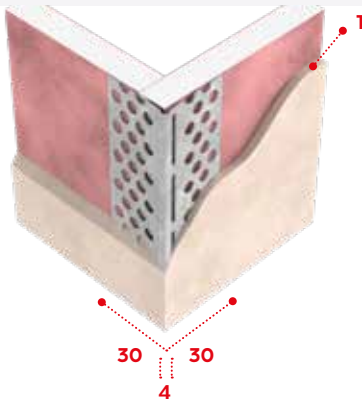

- This metal corner bead is designed for finishing the outside corners of drywall with angles ranging from 40° to 135°.
- Provides a high-quality finish and protection at drywall corners.
- Knurled & perforated wings for superior joint compound adhesion.
- Internal use only.

Lenix I30-VA

1057 1mm

Length -m-

2.8 3.0

Product Code

1057



Pcs / Bun

25



Pack / Pallet

90

- Other lengths between 2.0m and 3.0m available on request.


R25 & R25-S

Drywall Corner Bead

25mm knurled or smooth wing, drywall finish

CE
EN14353

- Galvanised Steel
- Z100 g/m²
- 0.40mm
- EN 14353

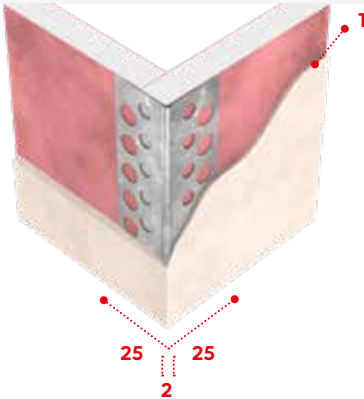

- Metal corner bead for drywall finishing.
- Provides a high-quality finish and protection at drywall corners.
- Perforated wings for superior joint compound adhesion.
- Internal use only.

Lenix R25 & R25-S Knurled surface

1063 1mm

Lenix R25 & R25-S Smooth surface

2372 1mm

Length -m-

2.5 3.0

Product Code

1063
2372



Pcs / Ctn

100
100



Pack / Pallet

50
50



For Downloads


Other lengths between 2.0m and 3.0m available on request. ■

R23 & R23-S Drywall Corner Bead

23mm knurled or smooth wing, drywall finish

CE
EN14353

- Aluminium
- 0.40 mm
- EN 14353

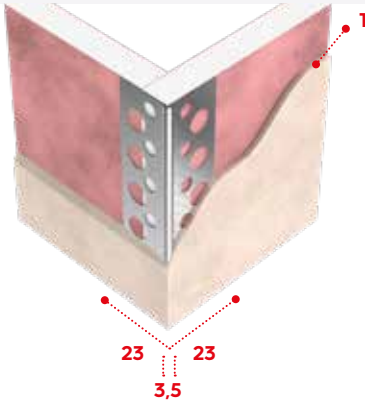

- Metal corner bead for drywall finishing.
- Provides a high-quality finish and protection at drywall corners.
- Perforated wings for superior joint compound adhesion.
- Internal use only.

Lenix R23 & R23-S Knurled surface

2472 1mm

Length -m-

2.5 3.0

Product Code

2472
2302



Pcs / Ctn

100
100



Pack / Pallet

80
80

Lenix R23 & R23-S Smooth surface

2302 1mm

- Other lengths between 2.0m and 3.0m available on request.


B7-S

Drywall Corner Bead

25mm wing, 1-3mm plaster depth, smooth-surface


EN14353

- Galvanised Steel Z100 g/m² - 0.40mm
- Aluzinc AZ150 g/m² - 0.40mm
- EN 14353

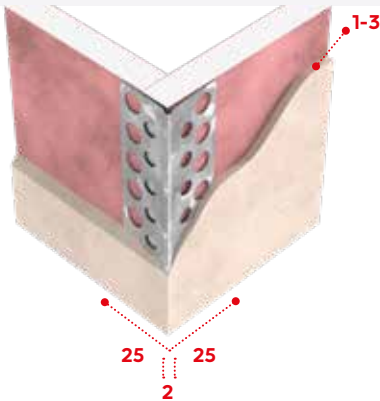



- Metal corner bead for drywall finishing.
- Provides a high-quality finish and protection at drywall corners.
- Perforated wings for superior joint compound adhesion.
- Internal use only.

| Lenix B7-S - Galvanised Steel | |
|-------------------------------|-------|
| 1077 | 1-3mm |

| Lenix B7-S - Aluzinc | |
|----------------------|-------|
| 2473 | 1-3mm |

| Length -m- | | |
|------------|-----|-----|
| 2.4 | 2.7 | 3.0 |

| Product Code |  |  |
|--------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| | Pcs / Ctn | Pack / Pallet |
| 1077 | 100 | 30 |
| 2473 | 100 | 30 |



For Downloads

Other lengths between 2.0m and 3.0m available on request. ■


L23

Drywall Stop L Bead

23mm knurled wing, drywall finish, 12.5mm plasterboard

CE
EN14353

- Galvanised Steel Z100 g/m² - 0.40mm
- Aluminium 0.35mm
- EN 14353

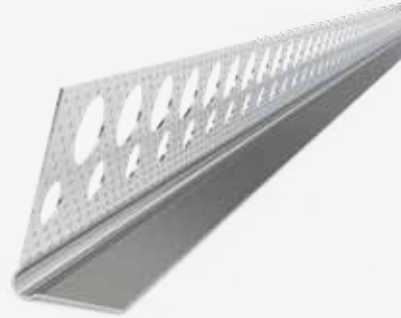

- Metal stop L bead for a clean finished edge at window & door openings or when plasterboard abuts dissimilar surfaces such as suspended ceilings, plaster, masonry and concrete.
- Knurled & perforated wings for superior joint compound adhesion.
- Internal use only.

Lenix L23 - Aluminium

1088 12.5mm

Length -m-

2.7 3.0

Lenix L23 - Galvanised Steel

2474 12.5mm



Product Code

Pcs / Ctn

Pack / Pallet

1088

200

50

2474

200

50

■ Other lengths between 2.0m and 3.0m available on request.



E23

Plasterboard Edge Bead

23mm knurled wing, 12.5mm or 15mm plasterboard





- Galvanised Steel
- Z100 g/m²
- 0.40mm
- EN 14353



- Provides solid protection and neat finished edges to plasterboards at window & door openings or when plasterboard meets dissimilar surfaces.
- Knurled & perforated wings for superior joint compound adhesion.
- Internal use only.
- Sizes available for 12.5mm or 15mm plasterboard.

| Lenix E23 | |
|-----------|--------|
| 1093 | 12.5mm |
| 1094 | 15mm |

| Length -m- |
|------------|
| 3.0 |

| Product Code |  Pcs / Ctn |  Pack / Pallet |
|--------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| | 1093 | 50 |
| 1094 | 50 | 50 |



For Downloads

Other lengths between 2.0m and 3.0m available on request. ■

J23

Plasterboard Edge J Bead $\text{C} \in$

23mm knurled wing, 12.5mm or 15mm plasterboard

EN14353



- Galvanised Steel
- Z100 g/m²
- 0.40mm
- EN 14353



- Provides solid protection and neat finished edges to plasterboards at window & door openings or when plasterboard meets dissimilar surfaces.
- Knurled & perforated wings for superior joint compound adhesion.
- Internal use only.
- Sizes available for 12.5mm or 15mm plasterboard.

| Lenix J23 | |
|-----------|--------|
| 1091 | 12.5mm |
| 1092 | 15mm |

| Length -m- | |
|------------|-----|
| 2.7 | 3.0 |

| Product Code |  Pcs / Ctn |  Pack / Pallet |
|--------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| | 1091 | 50 |
| 1092 | 50 | 50 |

■ Other lengths between 2.0m and 3.0m available on request.



V230

Corner Bead

23mm wing, 2mm plaster depth, perfect-edge

CE
EN14353

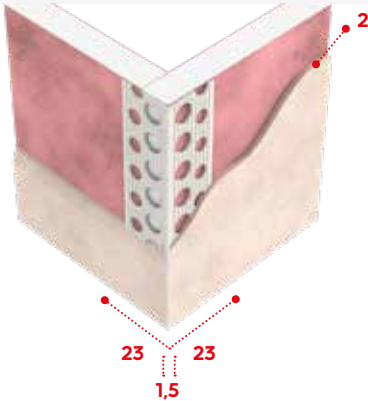

- uPVC
- White
- EN 14353



- PVC corner bead for thin coat plaster & drywall applications providing a high-quality finish and protection at drywall corners.
- Sharp rigid nose provide pointier corners for a modern look.
- Textured & knurled wings for a good joint compound adhesion.
- Perforated wings allow for expansion & contraction from temperature changes.
- Durable, impact and corrosion resistant.

| Lenix V230 | |
|------------|-----|
| 1067 | 2mm |

| Length -m- | |
|------------|-----|
| 2.5 | 3.0 |

| Product Code |  |  |
|--------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| | Pcs / Ctn | Pack / Pallet |
| 1067 | 100 | 40 |



For Downloads


Other lengths between 2.0m and 3.0m available on request. ■

V23 Corner Bead



23mm wing, 3mm plaster depth

CE
EN14353

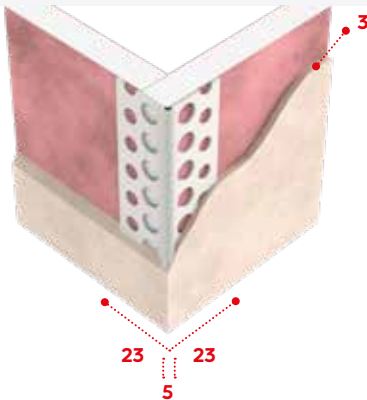- uPVC
- White
- EN 14353



- PVC corner bead for thin coat plaster & drywall applications providing a high-quality finish and protection at drywall corners.
- Textured & knurled wings for a good joint compound adhesion.
- Perforated wings allow for expansion & contraction from temperature changes.
- Durable, impact and corrosion resistant.

| Lenix V23 | | Length -m- | | Product Code |  Pcs / Ctn |  Pack / Pallet |
|-----------|-----|------------|-----|--------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| 1052 | 3mm | 2.5 | 3.0 | 1052 | 100 | 51 |

■ Other lengths between 2.0m and 3.0m available on request.


V23-A

Arch Bead



25mm wing, 3mm plaster depth

CE
EN14353

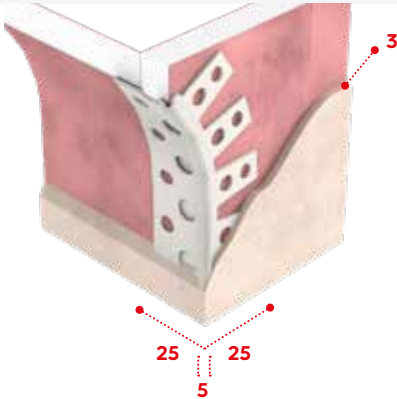- uPVC
- White
- EN 14353



- A flexible PVC arch corner bead for thin coat plaster & drywall applications providing a high-quality finish and protection at drywall curves & arches.
- Textured & knurled wings for a good joint compound adhesion.
- Perforated wings allow for expansion & contraction from temperature changes.
- Durable, impact and corrosion resistant.

| Lenix V23-A | | Length -m- | | Product Code |  Pcs / Ctn |  Pack / Pallet |
|-------------|-----|------------|-----|--------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| 1058 | 3mm | 2.5 | 3.0 | 1058 | 100 | 50 |



For Downloads


Other lengths between 2.0m and 3.0m available on request. ■

V25 Corner Bead

25mm wing, 2mm plaster depth

CE
EN14353

- uPVC
- White
- EN 14353

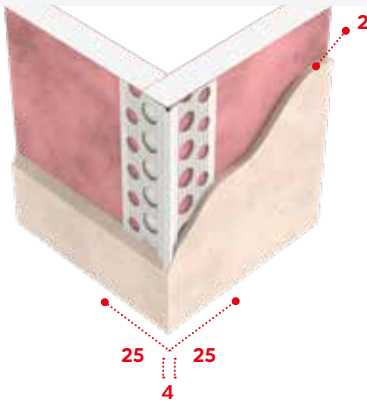

- PVC corner bead for thin coat plaster & drywall applications providing a high-quality finish and protection at drywall corners.
- Textured & knurled wings for a good joint compound adhesion.
- Perforated wings allow for expansion & contraction from temperature changes.
- Durable, impact and corrosion resistant.

| Lenix V25 | | Length -m- | | Product Code | Pcs / Ctn | Pack / Pallet |
|-----------|-----|------------|-----|--------------|-----------|---------------|
| 1060 | 2mm | 2.5 | 3.0 | 1060 | 100 | 50 |

■ Other lengths between 2.0m and 3.0m available on request.


V25-A

Arch Bead



25mm wing, 2mm plaster depth

CE
EN14353

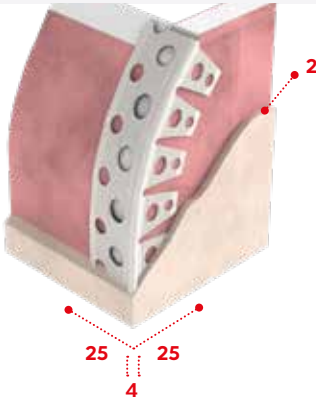- uPVC
- White
- EN 14353



- A flexible PVC arch corner bead for thin coat plaster & drywall applications providing a high-quality finish and protection at drywall curves & arches.
- Textured & knurled wings for a good joint compound adhesion.
- Perforated wings allow for expansion & contraction from temperature changes.
- Durable, impact and corrosion resistant.

| Lenix V25-A | | Length -m- | | Product Code |  Pcs / Ctn |  Pack / Pallet |
|-------------|-----|------------|-----|--------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| 1065 | 2mm | 2.5 | 3.0 | 1065 | 100 | 50 |



For Downloads

Other lengths between 2.0m and 3.0m available on request. ■




**INTERNAL PLASTER
BEADS**



X1 Plaster Corner Bead

35mm wing, 10-12mm plaster depth

CE
EN13658-1

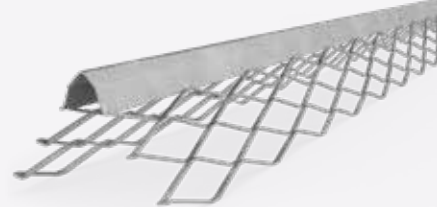

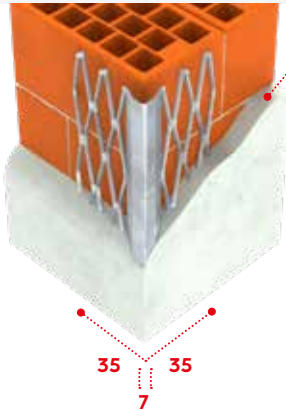

- Galvanised Steel
- Z275 g/m²
- 0.60 - 0.50mm
- EN 13658-1



- 10-12 Metal corner bead designed to provide a straight and true reinforced outside corner for internal 2-coat plaster applications.
- Expanded mesh wings form a strong bond to the substrate and allow for complete embedment of the entire bead, especially near the nose where strength is needed.
- Internal use only.

| Lenix X1 | |
|----------|--------|
| 1002 | 0.60mm |
| 1001 | 0.50mm |

| Length -m- | | | | |
|------------|-----|------|-----|--|
| 1.4 | 1.5 | 1.6 | 1.8 | |
| 2.0 | 2.2 | 2.25 | 2.5 | |
| 2.6 | 2.7 | 2.75 | 2.8 | |
| 3.0 | | | | |

| Product Code |  Pcs / Bun |  Pack / Pallet |
|--------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| | 1002 | 25 |
| 1001 | 25 | 100 |



For
Downloads




Other lengths between 2.0m and 3.0m available on request. ■

S5 Plaster Corner Bead

34mm wing, 10-12mm plaster depth

CE
EN13658-1

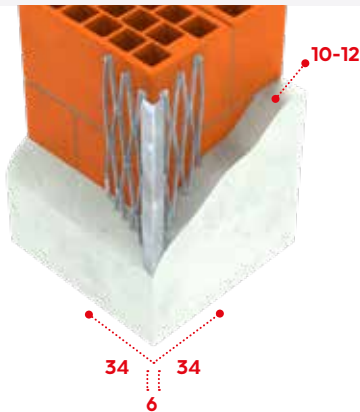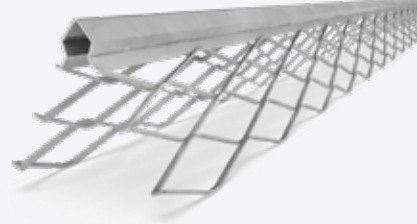

- Galvanised Steel
- 2275 g/m²
- 0.50mm
- EN 13658-1




- Metal corner bead designed to provide a straight and true reinforced outside corner for internal 2-coat plaster applications.
- Expanded mesh wings form a strong bond to the substrate and allow for complete embedment of the entire bead, especially near the nose where strength is needed.
- Internal use only.

| Lenix S5 | |
|----------|---------|
| 1003 | 10-12mm |

| Length -m- | | |
|------------|-----|-----|
| 2.5 | 2.8 | 3.0 |

| Product Code |  Pcs / Ctn |  Pack / Pallet |
|--------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| | 1003 | 100 |


| Product Code |  Pcs / Bun |  Pack / Pallet |
|--------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| | 1003 | 25 |

■ Other lengths between 2.0m and 3.0m available on request.


X4 Plaster Corner Bead

31mm wing, 10-12mm plaster depth

CE
EN13658-1

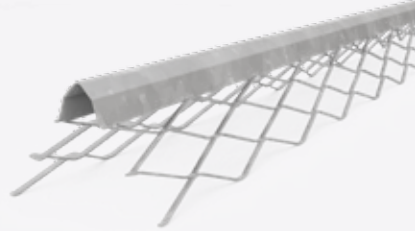

- Galvanised Steel
- 2275 g/m²
- 0.50mm
- EN 13658-1

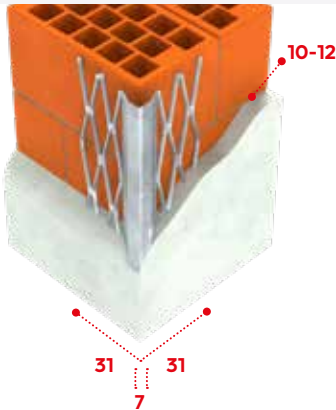

- Metal corner bead designed to provide a straight and true reinforced outside corner for internal 2-coat plaster applications.
- The expanded mesh wings form a strong bond to the substrate and allow for complete embedment of the entire bead, especially near the nose where strength is needed.
- Internal use only.

| Lenix X4 | |
|----------|---------|
| 2458 | 10-12mm |

| Length -m- | | | |
|------------|-----|------|-----|
| 1.4 | 1.5 | 1.6 | 1.8 |
| 2.0 | 2.2 | 2.25 | 2.5 |
| 2.6 | 2.7 | 2.75 | 2.8 |
| 3.0 | | | |

| Product Code | Pcs / Bun | Pack / Pallet |
|--------------|-----------|---------------|
| 2458 | 25 | 100 |



For
Downloads




Other lengths between 2.0m and 3.0m available on request. ■

E44 Angle Bead

44mm wing, 10-13mm plaster depth

CE
EN13658-1

- Galvanised Steel
- 2275 g/m²
- 0.40mm
- EN 13658-1

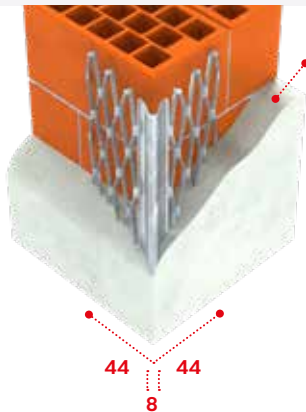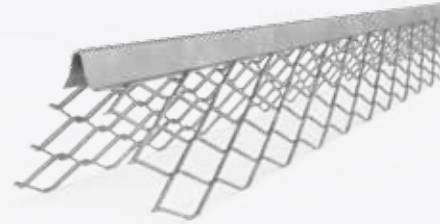

- Metal corner bead designed to provide a straight and true reinforced outside corner for internal 2-coat plaster applications.
- Expanded mesh wings form a strong bond to the substrate and allow for complete embedment of the entire bead, especially near the nose where strength is needed.
- Internal use only.

Lenix E44

2381 10-13mm

Length -m-

2.4 2.7 3.0

Product Code

2381



Pcs / Ctn

50



Pack / Pallet

50




■ Other lengths between 2.0m and 3.0m available on request.

E52 Plaster Stop Bead

52mm wing, 10mm or 14mm plaster depth



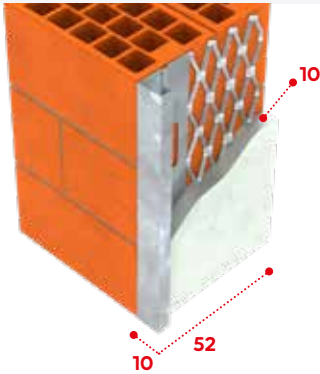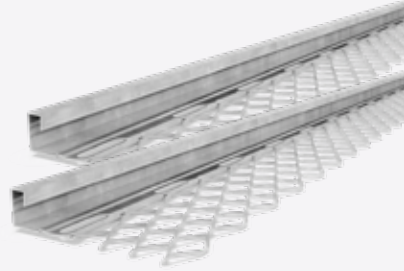

- Galvanised Steel
- 2275 g/m²
- 0.50mm
- EN 13658-1



- Metal stop bead for 2-coat plaster applications.
- Designed to effectively terminate plaster edge and/or to separate plaster from all other materials at doors, windows and other openings; also when plaster meets dissimilar material
- Expanded mesh wing provides excellent plaster embedment at the junctions of the bead and metal lath.
- Internal use only.

| Lenix E52 | |
|-----------|------|
| 1020 | 10mm |
| 2434 | 14mm |

| Length -m- | | |
|------------|-----|-----|
| 2.5 | 2.6 | 3.0 |

| Product Code |  |  |
|--------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| | Pcs / Bun | Pack / Pallet |
| 1020 | 25 | 70 |
| 2434 | 25 | 70 |




For
Downloads

Other lengths between 2.0m and 3.0m available on request. ■



F40 Plaster Corner Bead

40mm wing, 10mm plaster depth

CE
EN13658-1

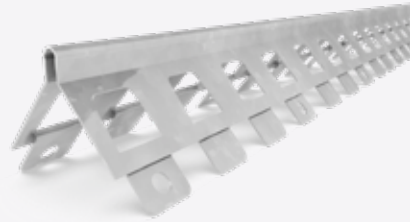

- Galvanised Steel
- 2275 g/m²
- 0.50mm
- EN 13658-1

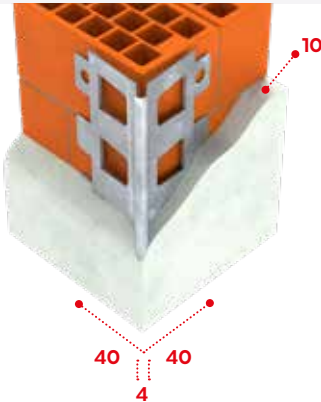

- Metal corner bead designed to provide a straight and true reinforced outside corner for internal 2-coat plaster applications.
- Large-perforated wing allows edge protection for mechanically stressed areas such as wall edges and window soffits.
- Internal use only.

Lenix F40

2311 10mm

Length -m-

2.25 2.5 3.0

Product Code

2311



Pcs / Shf

15



Pack / Pallet

80

- Other lengths between 2.0m and 3.0m available on request.

B1


Corner Bead

27mm wing, 6mm plaster depth



CE
EN13658-1

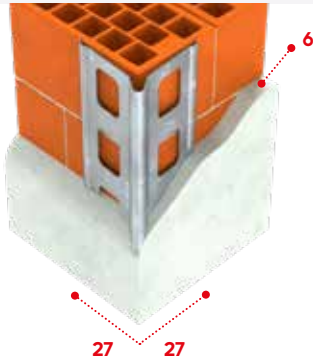

- Aluzinc
- AZ150 g/m²
- 0.40mm
- EN 13658-1



- Metal corner bead designed to provide a straight and true reinforced corner for internal plaster applications.
- The large-perforated wings allow for edge protection for mechanically stressed areas such as wall edges and window soffits.
- Internal use only.

| Lenix B1 | | Length -m- | | Product Code |  Pcs / Bun |  Pack / Pallet |
|----------|-----|------------|-----|--------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| 1015 | 6mm | 2.6 | 3.0 | 1015 | 25 | 80 |



For
Downloads



Other lengths between 2.0m and 3.0m available on request. ■

B9-S Thin Coat Bead

25mm wing, 3mm plaster depth, smooth-surface

CE
EN13658-1

- Aluzinc
- AZ150 g/m²
- 0.40mm
- EN 13658-1

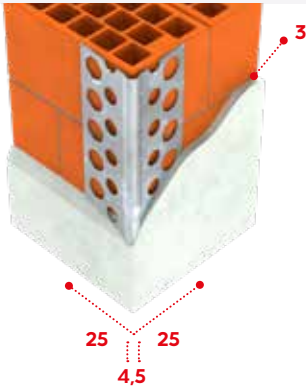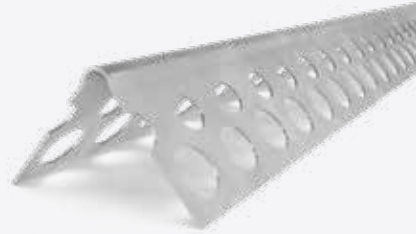

- Metal corner bead designed to provide a straight and true reinforced corner for thin coat plaster and drywall applications.
- The perforated wings allow for superior plaster key.
- Use on plasterboard or aerated blocks.
- Internal use only.

Lenix B9-S

2475 3mm

Length -m-

2.7 2.8 3.0

Product Code

2475



Pcs / Bun

25



Pack / Pallet

100


■ Other lengths between 2.0m and 3.0m available on request.

E3 Thin Coat Stop Bead

26mm wing, 3mm plaster depth

CE
EN14353

- Galvanised Steel
- 2275 g/m²
- 0.50mm
- EN 14353

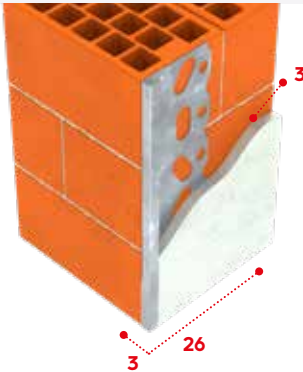

- Metal stop bead designed to provide a straight neat finish and also reinforce thin-coat plaster on its edge.
- Terminates thin-coat plaster at openings, abutment of walls and for ceiling finishes.
- Internal use only.

| Lenix E22 | |
|-----------|-----|
| 2549 | 3mm |

| Length -m- | | |
|------------|-----|-----|
| 2.4 | 2.7 | 3.0 |

| Product Code | Pcs / Ctn | Pack / Pallet |
|--------------|-----------|---------------|
| 2549 | 50 | 70 |



Other lengths between 2.0m and 3.0m available on request. ■

B50


Thin Coat Stop Bead

26mm wing, 3mm or 6mm plaster depth

CE
EN13658-1





- Aluzinc
- AZ150 g/m²
- 0.40mm
- EN 13658-1



- Metal stop bead designed to provide a straight neat finish and also reinforce thin-coat plaster on its edge.
- Terminates thin-coat plaster at openings, abutment of walls and for ceiling finishes.
- Internal use only.

| Lenix B50 | |
|-----------|-----|
| 2532 | 3mm |
| 2536 | 6mm |

| Length -m- | |
|------------|-----|
| 2.7 | 3.0 |

| Product Code |  Pcs / Bun |  Pack / Pallet |
|--------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| | 2532 | 25 |
| 2536 | 25 | 100 |



For
Downloads


Other lengths between 2.0m and 3.0m available on request. ■

D3 Depth Gauge Bead

19mm wing, 6mm plaster depth

CE
EN13658-1

- Galvanised Steel
- 2275 g/m²
- 0.50 mm
- EN 13658-1



- Plaster depth gauge bead for internal plastering.
- Designed to control and maintain the thickness of plaster during application, ensuring a consistent and professional finish.
- Acts as a guide to ensure that the material is spread to the desired thickness.

Lenix D3

2255 6mm

Length -m-

2.5 2.6 2.75 2.8
3.0

Product Code

2255



Pcs / Bun

50



Pack / Pallet

100

- Other lengths between 2.0m and 3.0m available on request.


D6

Depth Gauge Bead

21mm wing, 6mm plaster depth

CE
EN13658-1

- Galvanised Steel Z275 g/m² - 0.50mm
- Aluzinc AZ150 g/m² - 0.40mm
- EN 13658-1





- Plaster depth gauge bead for internal plastering.
- Designed to control and maintain the thickness of plaster during application, ensuring a consistent and professional finish.
- Acts as a guide to ensure that the material is spread to the desired thickness.

| Lenix D6 - Galvanised Steel | |
|-----------------------------|-----|
| 1026 | 6mm |

| Lenix D6 - Aluzinc | |
|--------------------|-----|
| 1023 | 6mm |

| Length -m- | | | |
|------------|-----|------|------|
| 2.5 | 2.6 | 2.75 | 2.80 |
| 3.0 | | | |

| Product Code |  |  |
|--------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| | Pcs / Bun | Pack / Pallet |
| 1026 | 50 | 100 |
| 1023 | 50 | 100 |



For
Downloads


Other lengths between 2.0m and 3.0m available on request. ■

D10 Depth Gauge Bead

21mm wing, 10mm plaster depth

CE
EN13658-1

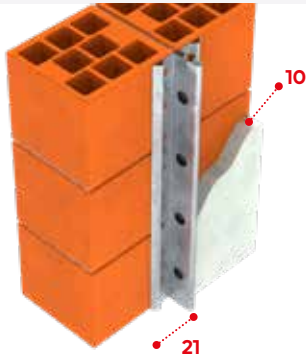

- Galvanised Steel
- 2275 g/m²
- 0.50mm
- EN 13658-1



- Plaster depth gauge bead for internal plastering.
- Designed to control and maintain the thickness of plaster during application, ensuring a consistent and professional finish.
- Acts as a guide to ensure that the material is spread to the desired thickness.

| Lenix D10 | |
|-----------|------|
| 1032 | 10mm |

| Length -m- | | | |
|------------|-----|------|-----|
| 2.5 | 2.6 | 2.75 | 2.8 |
| 3.0 | | | |

| Product Code |  Pcs / Bun |  Pack / Pallet |
|--------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| | 1032 | 50 |

■ Other lengths between 2.0m and 3.0m available on request.




**EXTERNAL RENDER
BEADS**



F4 Corner Bead

40mm wing, 10mm or 14mm render depth

CE
EN 13658-2

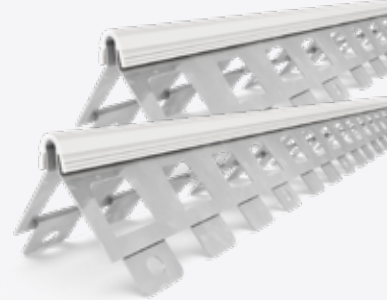

- Galvanised Steel with uPVC-nose
- 2275 g/m²
- 0.50mm
- EN 13658-2

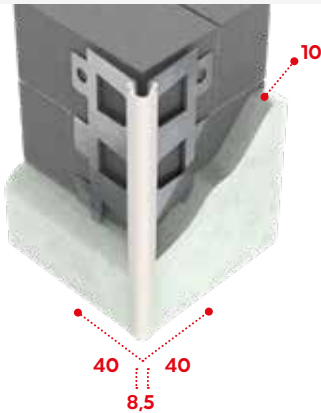



- Metal corner bead with uPVC nose for external render applications.
- Provides neat, straight and strong external render corners.
- Perforated wings for superior render adhesion and crack prevention.
- uPVC nose for wear & corrosion-resistance and edge-protection also.

| Lenix F4 - White | |
|------------------|------|
| 1047 | 10mm |
| 2308 | 14mm |

| Lenix F4 - Beige | |
|------------------|------|
| 1047 | 10mm |
| 2308 | 14mm |

| Length -m- | | |
|------------|-----|-----|
| 2.25 | 2.5 | 3.0 |


| Product Code |  |  |
|--------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| | Pcs / Shf | Pack / Pallet |
| 1047 | 15 | 80 |
| 2308 | 15 | 80 |
| 1047 | 15 | 80 |
| 2308 | 15 | 80 |

- Other lengths between 2.0m and 3.0m available on request.



F5 Corner Bead

50mm wing, 12mm render depth

CE
EN13658-2

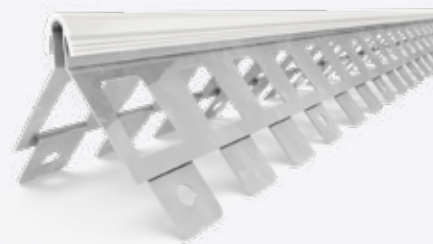

- Galvanised Steel with uPVC-nose
- White
- 2275 g/m²
- 0.50mm
- EN 13658-2

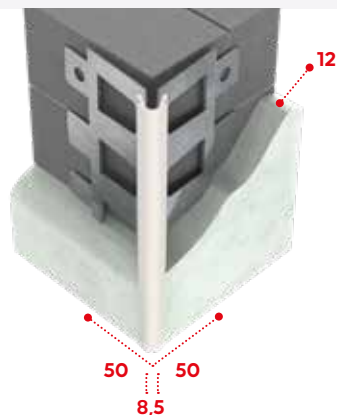

- Metal corner bead with uPVC nose for external render applications.
- Provides neat, straight and strong external render corners.
- Perforated wings for superior render adhesion and crack prevention.
- uPVC nose for wear & corrosion-resistance and edge-protection also.

Lenix F5

1045 12mm

Length -m-

2.75 3.0

Product Code

1045



Pcs / Shf

15



Pack / Pallet

70



For
Downloads

Other lengths between 2.0m and 3.0m available on request. ■



F7 Stop Profile

50mm wing, 10mm or 14mm render depth

CE
EN13658-2



- Galvanised Steel with uPVC-nose
- 2275 g/m²
- 0.50mm
- EN 13658-2

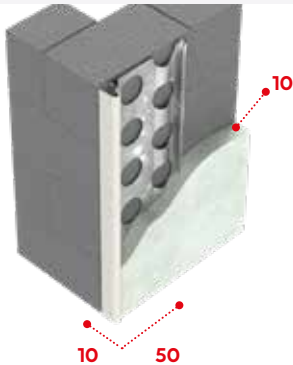



- Metal stop profile with uPVC nose for neat, straight and strong external render edges.
- Perforated wings for superior render adhesion and crack prevention.
- uPVC nose for wear & corrosion-resistance and edge-protection also.
- Neatly terminates render against window & door frames and other dissimilar materials.

| Lenix F7 - White | |
|------------------|------|
| 1048 | 10mm |
| 1049 | 14mm |

| Lenix F7 - Beige | |
|------------------|------|
| 1048 | 10mm |
| 1049 | 14mm |

| Length -m- | | |
|------------|-----|-----|
| 2.25 | 2.5 | 3.0 |

| Product Code |  |  |
|--------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| | Pcs / Bun | Pack / Pallet |
| 1048 | 15 | 80 |
| 1049 | 15 | 80 |
| 1048 | 15 | 80 |
| 1049 | 15 | 80 |

■ Other lengths between 2.0m and 3.0m available on request.



F9

Base Profile

50mm wing, 10mm or 14mm render depth

CE
EN13658-2

- Galvanised Steel with uPVC-nose
- 2275 g/m²
- 0.50mm
- EN 13658-2

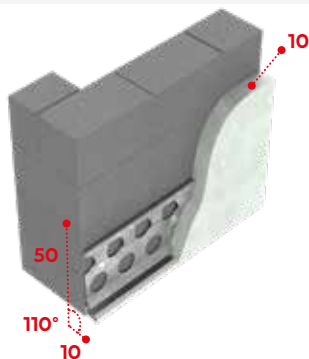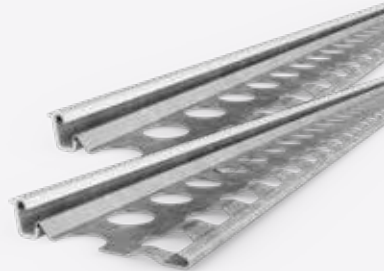

- Metal base profile with uPVC nose for forming drip edges and perimeter base support for external render applications.
- Forms and protects the lower edge of the render.
- Drip leg with an angle of 110 to direct moisture away from openings and foundation walls. Designed to be used above window & door openings or along the DPC level to assist with moving moisture/ rainwater away from the wall.
- Perforated wings for superior render adhesion and crack prevention.
- uPVC nose for wear & corrosion-resistance and edge-protection also.

Lenix F9 - White

| | |
|------|------|
| 1050 | 10mm |
| 1051 | 14mm |

Lenix F9 - Beige

| | |
|------|------|
| 1050 | 10mm |
| 1051 | 14mm |

Length -m-

| | | |
|------|-----|-----|
| 2.25 | 2.5 | 3.0 |
|------|-----|-----|

Product Code

| |
|------|
| 1050 |
| 1051 |
| 1050 |
| 1051 |



Pcs / Bun

| |
|----|
| 15 |
| 15 |
| 15 |
| 15 |



Pack / Pallet

| |
|----|
| 80 |
| 80 |
| 80 |
| 80 |

Other lengths between 2.0m and 3.0m available on request. ■




For Downloads





**uPVC BEADS FOR
EXTERNAL & INTERNAL USE**

E41 Angle Bead

41mm wing, 4-6-8-10-13-15-20mm render/plaster depth

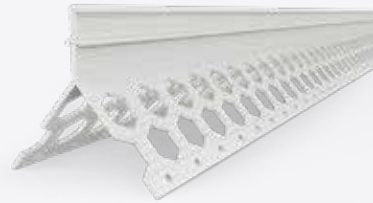

- uPVC
- White
- EN 13658-2

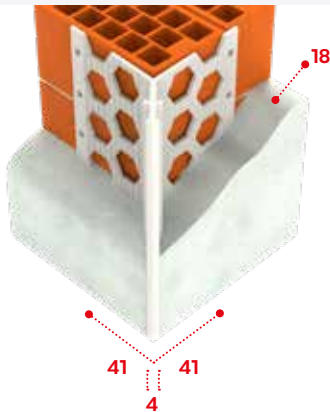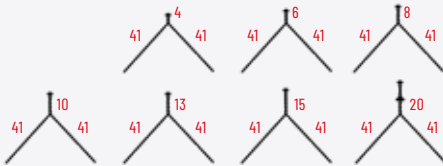

- Exterior grade uPVC corner bead for external render and also internal plaster applications.
- Provides rust-proof, high-impact-resistant and straight corners.
- Large perforations allow material to easily flow through and bond to the substrate for a more durable corner.

Lenix E41 - White

| | |
|------|------|
| 1041 | 20mm |
| 1042 | 15mm |
| 2692 | 13mm |
| 2394 | 10mm |
| 1043 | 8mm |
| 2341 | 6mm |
| 2402 | 4mm |

Length -m-

2,5 3,0

Product Code

1041
1042
2394
1043
2341
2402



Pcs / Ctn

34
34
34
34
50
50



Pack / Pallet

28
36
40
40
36
36

- Other lengths between 2.0m and 3.0m available on request.





S15 Corner Bead



28mm wing, 7-8mm render/plaster depth

CE
EN 13658-2

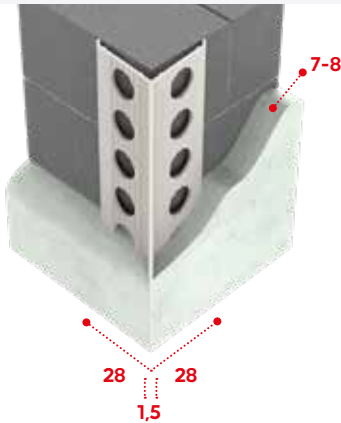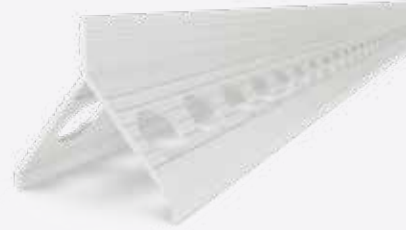- uPVC
- white
- EN 13658-2



- Exterior grade uPVC corner bead for external render and also internal plaster applications.
- Provides rust-proof, high-impact-resistant and straight corners.
- Perforations allow material to easily flow through and bond to the substrate for a more durable corner.

| Lenix S15 | | Length -m- | | | Product Code |  Pcs / Ctn |  Pack / Pallet |
|-----------|-------|------------|-----|-----|--------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| 1038 | 7-8mm | 2.5 | 2.6 | 3.0 | 1038 | 50 | 51 |



For
Downloads



Other lengths between 2.0m and 3.0m available on request. ■

S15-XL Corner Bead

32mm wing 8 mm render/plaster depth

CE
EN 13658-2

- uPVC
- White
- EN 13658-2

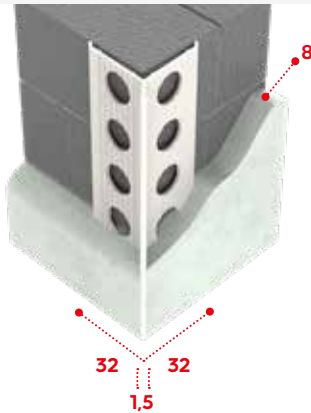

- Exterior grade uPVC corner bead for external render and also internal plaster applications.
- Provides rust-proof, high-impact-resistant and straight corners.
- Large perforations allow material to easily flow through and bond to the substrate for a more durable corner.

Lenix S15-XL

2654

8mm

Length -m-

2.5

Product Code

2654



Pcs / Cts

50



Pack / Pallet

51

■ Other lengths between 2.0m and 3.0m available on request.



E45

Bellcast/Drip Bead

40mm wing, 6-10-15-18mm render depth

CE
EN 13658-2

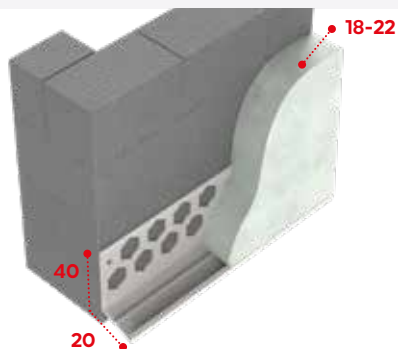

- uPVC
- White
- EN 13658-2



- Exterior grade uPVC drip bead for forming drip edges and perimeter base support for external render applications.
- Forms and protects the lower edge of the render.
- Drip leg to direct moisture away from openings and foundation walls. Designed to be used above window & door openings or along the DPC level to assist with moving moisture/rainwater away from the wall.

| Lenix E45 - White | |
|-------------------|---------|
| 2457 | 18-20mm |
| 2456 | 15mm |
| 2455 | 10mm |
| 2454 | 6mm |

| Length -m- | |
|------------|-----|
| 2.5 | 3.0 |

| Product Code |  |  |
|--------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| | Pcs / Ctn | Pack / Pallet |
| 2457 | 34 | 65 |
| 2456 | 34 | 65 |
| 2455 | 34 | 65 |
| 2454 | 50 | 65 |



For
Downloads

Other lengths between 2.0m and 3.0m available on request. ■



E40

Plaster Stop Bead

40mm wing, 6-10-15-18mm render/plaster depth


EN13658-2

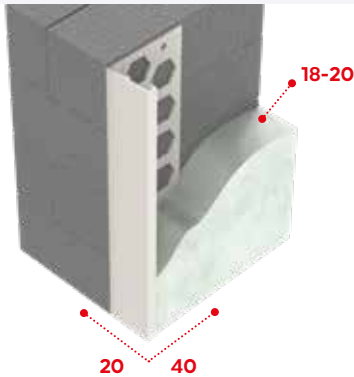

- uPVC
- White
- EN 13658-2



- Exterior grade uPVC stop bead for external render and also internal plaster applications.
- Neatly terminates render and plaster against window & door frames and other dissimilar materials.

| Lenix E40 - White | |
|-------------------|---------|
| 2453 | 18-20mm |
| 2452 | 15mm |
| 2451 | 10mm |
| 2450 | 6mm |

| Length -m- | |
|------------|-----|
| 2.5 | 3.0 |

| Product Code |  Pcs / Ctn |  Pack / Pallet |
|--------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| | 2453 | 34 |
| 2452 | 34 | 65 |
| 2451 | 34 | 80 |
| 2450 | 50 | 65 |

■ Other lengths between 2.0m and 3.0m available on request.


S35

Corner Bead



35mm wing, 10-12mm render/plaster depth

CE
EN13658-2

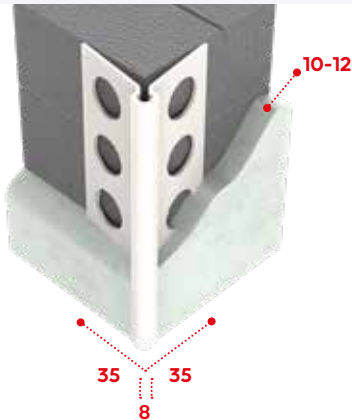- uPVC
- White
- EN 13658-2



- Exterior grade uPVC corner bead for external render and also internal plaster applications.
- Provides rust-proof, high-impact-resistant and straight corners.
- Perforations allow material to easily flow through and bond to the substrate for a more durable corner.

| Lenix S35 | | Length -m- | Product Code |  Pcs / Ctn |  Pack / Pallet |
|-----------|---------|------------|--------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| 2425 | 10-12mm | 2.5 | 2425 | 50 | 36 |



For
Downloads



Other lengths between 2.0m and 3.0m available on request. ■

S25 Corner Bead

25mm wing, 6mm render/plaster depth

CE
EN13658-2

- uPVC
- White
- EN 13658-2

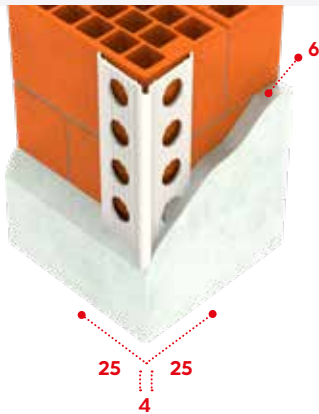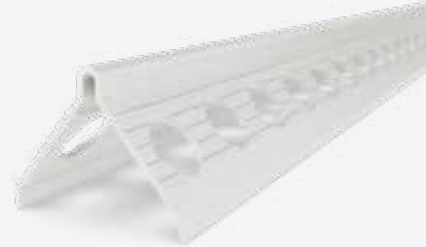

- Exterior grade uPVC corner bead for external render and also internal plaster applications.
- Provides rust-proof, high-impact-resistant and straight corners.
- Perforations allow material to easily flow through and bond to the substrate for a more durable corner.

| Lenix S25 | | Length -m- | | | | Product Code |  Pcs / Ctn |  Pack / Pallet |
|-----------|-----|------------|-----|-----|-----|--------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| 1040 | 6mm | 2.5 | 2.6 | 2.8 | 3.0 | 1040 | 100 | 60 |


■ Other lengths between 2.0m and 3.0m available on request.

S25 XL


Corner Bead

28mm wing, 6mm plaster/render finish

CE
EN13658-2

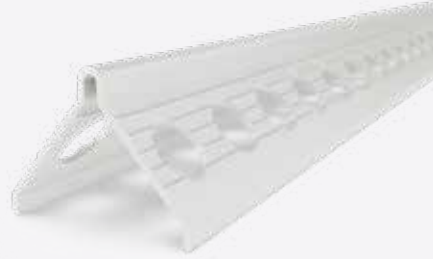

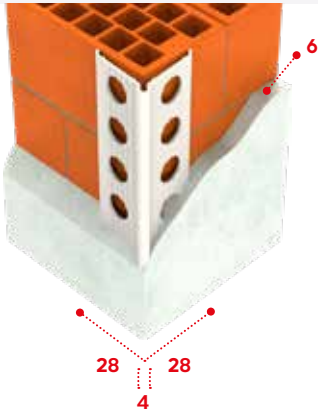

- uPVC
- White
- EN 13658-2



- Exterior grade uPVC corner bead for external render and also internal plaster applications.
- Provides rust-proof, high-impact-resistant and straight corners.
- Perforations allow material to easily flow through and bond to the substrate for a more durable corner.

| Lenix S25 XL | |
|--------------|-----|
| 1039 | 6mm |

| Length -m- | | | |
|------------|-----|-----|-----|
| 2.5 | 2.6 | 2.8 | 3.0 |

| Product Code |  |  |
|--------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| | Pcs / Ctn | Pack / Pallet |
| 1039 | 100 | 40 |



For
Downloads



Other lengths between 2.0m and 3.0m available on request. ■

V32 Corner Bead

32mm wing, 4-6-8-10mm plaster depth


EN13658-2

- uPVC
- White
- EN 13658-2

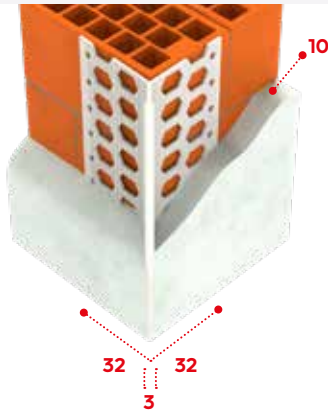

- uPVC corner bead for internal plaster applications.
- Provides rust-proof, high-impact-resistant and straight corners.
- Perforations allow material to easily flow through and bond to the substrate for a more durable corner.

Lenix V32

| | |
|------|------|
| 1033 | 10mm |
| 1034 | 8mm |
| 1035 | 6mm |
| 1036 | 4mm |

Length -m-

| | | |
|-----|-----|-----|
| 2.5 | 2.7 | 3.0 |
|-----|-----|-----|

Product Code

| |
|------|
| 1033 |
| 1034 |
| 1035 |
| 1036 |



Pcs / Ctn

| |
|----|
| 25 |
| 30 |
| 40 |
| 50 |



Pack / Pallet

| |
|----|
| 44 |
| 44 |
| 40 |
| 40 |

■ Other lengths between 2.0m and 3.0m available on request.



S7

Guide Profile

30mm wing, 7mm plaster depth

- uPVC
- White
- EN13658-2



CE
EN13658-2



➤ uPVC profile for ensuring quick & exact wall surfaces and consistent plaster depths.

| Lenix S7 | |
|----------|-----|
| 2424 | 7mm |

| Length -m- |
|------------|
| 2.0 |

| Product Code |  |  |
|--------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| | Pcs / Ctn | Pack / Pallet |
| 2424 | 100 | 50 |



For
Downloads

Other lengths between 2.0m and 3.0m available on request. ■




THERMAL INSULATION BEADS

F1

Starter Track

35x20mm, for insulation of 30 - 300mm

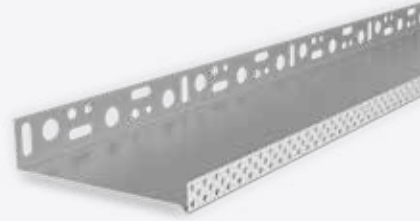

- Aluminium
- 1.2mm and 1.0mm thickness
- CPT 3035



- Aluminium base profile for starting ETICS/EIFS/EWI systems.
- Integrated drip edge to safeguard insulation from rising moisture.
- Provides targeted water drainage and flush alignment for a clean, straight and sturdy base support.
- Designed for use along the plinth area to help divert moisture/rainwater away from foundation walls.

1.2mm



| -w- Insulation | Product Number | Length | Pcs / Bun | Packs / Pallet |
|-------------------|-------------------|--------|-----------|----------------|
| 30 mm | 2476 | 2.5m | 20 | 121 |
| 40 mm | 2477 | 2.5m | 20 | 108 |
| 50 mm | 2478 | 2.5m | 20 | 77 |
| 60 mm | 2479 | 2.5m | 20 | 86 |
| 70 mm | 2480 | 2.5m | 20 | 90 |
| 80 mm | 2481 | 2.5m | 20 | 65 |
| 90 mm | 2482 | 2.5m | 20 | 60 |
| 100 mm | 1216 | 2.5m | 20 | 54 |
| 110 mm | 2483 | 2.5m | 10 | 45 |
| 120 mm | 1218 | 2.5m | 10 | 45 |
| 130 mm | 2484 | 2.5m | 10 | 40 |
| 140 mm | 1220 | 2.5m | 10 | 40 |
| 150 mm | 2485 | 2.5m | 10 | 36 |
| 160 mm | 1222 | 2.5m | 10 | 36 |
| 170 mm | 2487 | 2.5m | 10 | 31 |
| 180 mm | 1224 | 2.5m | 10 | 31 |
| 190 mm | 2490 | 2.5m | 10 | 30 |
| 200 mm | 1226 | 2.5m | 10 | 30 |

1.0mm



| -w- Insulation | Product Number | Length | Pcs / Bun | Pack / Pallet |
|-------------------|-------------------|--------|-----------|---------------|
| 30 mm | 1193 | 2.5m | 20 | 121 |
| 40 mm | 1194 | 2.5m | 20 | 108 |
| 50 mm | 1195 | 2.5m | 20 | 77 |
| 60 mm | 1196 | 2.5m | 20 | 86 |
| 70 mm | 1197 | 2.5m | 20 | 90 |
| 80 mm | 1198 | 2.5m | 20 | 65 |
| 90 mm | 1199 | 2.5m | 20 | 60 |
| 100 mm | 1200 | 2.5m | 20 | 54 |
| 110 mm | 2491 | 2.5m | 10 | 45 |
| 120 mm | 1202 | 2.5m | 10 | 45 |
| 130 mm | 2492 | 2.5m | 10 | 40 |
| 140 mm | 1204 | 2.5m | 10 | 40 |
| 150 mm | 2493 | 2.5m | 10 | 36 |
| 160 mm | 1206 | 2.5m | 10 | 36 |
| 170 mm | 2494 | 2.5m | 10 | 31 |
| 180 mm | 1208 | 2.5m | 10 | 31 |
| 190 mm | 2495 | 2.5m | 10 | 30 |
| 200 mm | 1210 | 2.5m | 10 | 30 |

Available to order in sizes up to 300mm. ■

Custom lengths on request. ■




For
Downloads

A1

Starter Track

30x15mm, for insulation of 30 - 300mm

CE
ETAG004

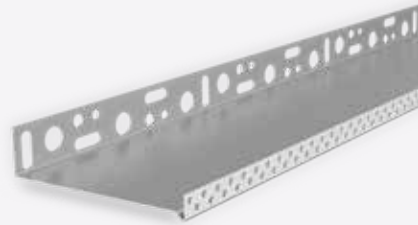

- Aluminium
- 1.0mm and 0.8mm thickness



- Aluminium base profile for starting ETICS/EIFS/EWI systems.
- Integrated drip edge to safeguard insulation from rising moisture.
- Provides targeted water drainage and flush alignment for a clean, straight and sturdy base support.
- Designed for use along the plinth area to help divert moisture/rainwater away from foundation walls.

1.0mm



| -w- Insulation | Product Number | Length | Pcs / Bun | Pack / Pallet |
|-------------------|-------------------|--------|-----------|---------------|
| 30 mm | 2496 | 2.5m | 10 | 121 |
| 40 mm | 2497 | 2.5m | 10 | 108 |
| 50 mm | 2498 | 2.5m | 10 | 77 |
| 60 mm | 2499 | 2.5m | 10 | 86 |
| 70 mm | 2500 | 2.5m | 10 | 90 |
| 80 mm | 2501 | 2.5m | 10 | 65 |
| 90 mm | 2502 | 2.5m | 10 | 60 |
| 100 mm | 2503 | 2.5m | 10 | 54 |
| 110 mm | 2504 | 2.5m | 10 | 45 |
| 120 mm | 2505 | 2.5m | 10 | 45 |
| 130 mm | 2506 | 2.5m | 10 | 40 |
| 140 mm | 2507 | 2.5m | 10 | 40 |
| 150 mm | 2508 | 2.5m | 10 | 36 |
| 160 mm | 2509 | 2.5m | 10 | 36 |
| 170 mm | 2510 | 2.5m | 10 | 31 |
| 180 mm | 2511 | 2.5m | 10 | 31 |
| 190 mm | 2512 | 2.5m | 10 | 30 |
| 200 mm | 2513 | 2.5m | 10 | 30 |

0.8mm



| -w- insulation | Product Number | Length | Pcs / Bun | Pack / Pallet |
|-------------------|-------------------|--------|-----------|---------------|
| 30 mm | 1166 | 2.5m | 10 | 121 |
| 40 mm | 1167 | 2.5m | 10 | 108 |
| 50 mm | 1168 | 2.5m | 10 | 77 |
| 60 mm | 1169 | 2.5m | 10 | 86 |
| 70 mm | 1170 | 2.5m | 10 | 90 |
| 80 mm | 1171 | 2.5m | 10 | 65 |
| 90 mm | 1172 | 2.5m | 10 | 60 |
| 100 mm | 1173 | 2.5m | 10 | 54 |
| 110 mm | 2514 | 2.5m | 10 | 45 |
| 120 mm | 1175 | 2.5m | 10 | 45 |
| 130 mm | 2515 | 2.5m | 10 | 40 |
| 140 mm | 1176 | 2.5m | 10 | 40 |
| 150 mm | 2516 | 2.5m | 10 | 36 |
| 160 mm | 1177 | 2.5m | 10 | 36 |
| 170 mm | 2517 | 2.5m | 10 | 31 |
| 180 mm | 1178 | 2.5m | 10 | 31 |
| 190 mm | 2518 | 2.5m | 10 | 30 |
| 200 mm | 1179 | 2.5m | 10 | 30 |

- Available to order in sizes up to 300mm.
- Custom lengths on request.




V22F

Mesh Corner Bead

22mm wing, mesh width of
10x30cm 10x23cm 10x15 cm 10x10cm 8x12cm

CE
ETAG004

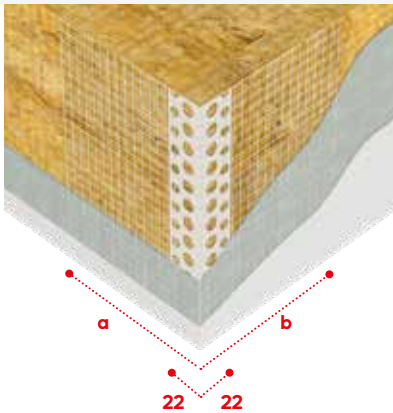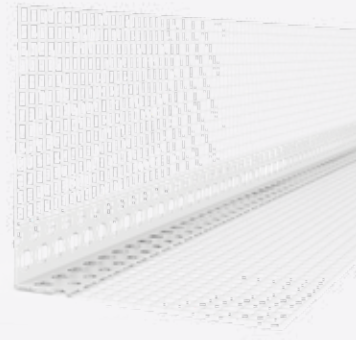

- uPVC
- 1.1mm thickness
- 145 g/m² glass fibre mesh
- White



- uPVC corner bead with mesh reinforces and protects corners in ETICS/EIFS/EWI systems, formed by insulation boards.
- Perforated wings on the bead ensure true corners with precise and neat edges.
- Glass fibre mesh to provide superior keying with the finishing coat and avoid cracking.

| Lenix V22F | |
|------------|---------|
| 1105 | 10x30cm |
| 1104 | 10x23cm |
| 1103 | 10x15cm |
| 1102 | 10x10cm |
| 1106 | 8x12cm |

| Length -m- |
|------------|
| 2.5 |

| Product Code |  Pcs / Ctn |  Pack / Pallet |
|--------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| | 1105 | 50 |
| 1104 | 50 | 28 |
| 1103 | 50 | 36 |
| 1102 | 50 | 42 |
| 1106 | 50 | 42 |



For
Downloads




Brand logo imprint on-mesh available. ■
Other lengths between 2.5m and 3.0m available on request. ■

V20F Mesh Corner Bead

20mm wing, mesh width of
10x30cm 10x23cm 10x15 cm 10x10cm 8x12cm

CE
ETAG004

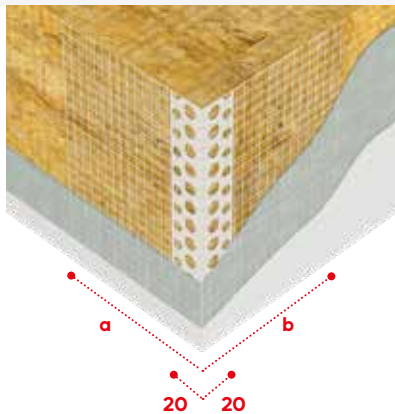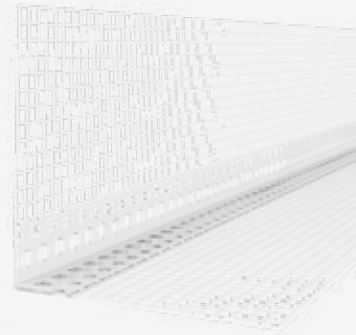

- uPVC
- 1.0mm thickness
- 145 g/m² glass fibre mesh
- White



- uPVC corner bead with mesh reinforces and protects corners in ETICS/EIFS/EWI systems, formed by insulation boards.
- Perforated wings on the bead ensure true corners with precise and neat edges.
- Glass fibre mesh to provide superior keying with the finishing coat and avoid cracking.

| Lenix V20F | |
|------------|---------|
| 2465 | 10x30cm |
| 2464 | 10x23cm |
| 2463 | 10x15cm |
| 2462 | 10x10cm |
| 2444 | 8x12cm |

| Length -m- |
|------------|
| 2.5 |

| Product Code |  Pcs / Ctn |  Pack / Pallet |
|--------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| | 2465 | 50 |
| 2464 | 50 | 28 |
| 2463 | 50 | 36 |
| 2462 | 50 | 42 |
| 2444 | 50 | 42 |

- Mesh with customized logo imprint
- Custom lengths on request.




SHY

Mesh Drip Bead

Invisible drip edge

- uPVC
- 1.1mm thickness
- 145 g/m² glass fibre mesh
- White

CE
ETAG004

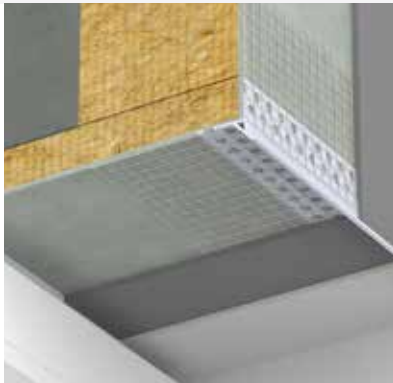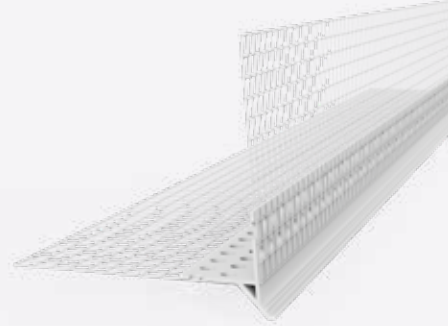

- Exterior grade uPVC drip bead with mesh to form drip edges to protect insulated render systems from water penetration in ETICS/ EIFS/EWI systems.
- Designed to be used on the undersides of window heads & balconies.
- Drip edge to direct water away from openings and along the balcony & lintel soffits to assist with moving moisture/rainwater away from the wall.
- Grooved inner-surface for a better render grip.
- Ultrasonic-welded glass fibre mesh with a 10x10cm width for improved reinforcement and crack resistance.
- Provides a 6mm render depth for both base and final coats.
- Completely encapsulated in render.

Lenix SHY

1127 10x10cm

Length -m-

2.5

Product Code

1127



Pcs / Ctn

25



Pack / Pallet

40



For
Downloads



Other lengths between 2.5m and 3.0m available on request. ■

VIZZY Mesh Drip Bead



Visible drip edge

CE
ETAG004

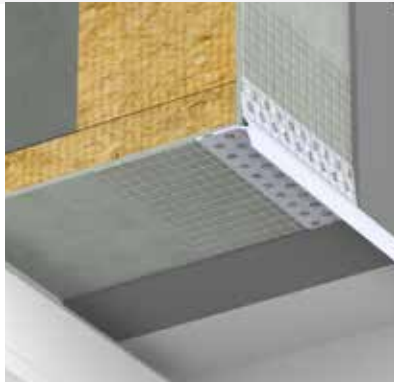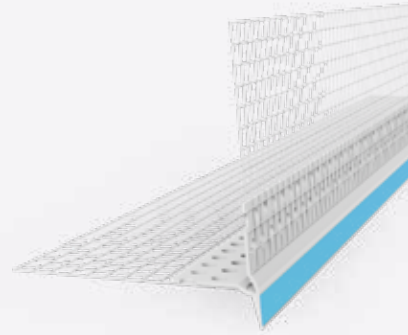- uPVC
- 1.1mm thickness
- 145 g/m² glass fibre mesh
- White



- Exterior grade uPVC drip bead with mesh to form drip edges to protect insulated render systems from water penetration in ETICS/EIFS/EWI systems.
- Designed to be used on the undersides of window heads & balconies.
- Drip edge to direct water away from openings and along the balcony & lintel soffits to assist with moving moisture/rainwater away from the wall.
- Grooved inner-surface for a better render grip.
- Ultrasonic-welded glass fibre mesh with a 10x10cm width for improved reinforcement and crack resistance.
- Provides a 6mm render depth for both base and final coats.
- Protective film coating on drip leg to be removed whenever desired.

| Lenix VIZZY | | Length -m- | Product Code |  Pcs / Ctn |  Pack / Pallet |
|-------------|---------|------------|--------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| 1125 | 10x10cm | 2.5 | 1125 | 25 | 40 |

■ Other lengths between 2.5m and 3.0m available on request.




V23F-A

Mesh Arch Bead



25mm wing, mesh width of 10x10cm

CE
ETAG004

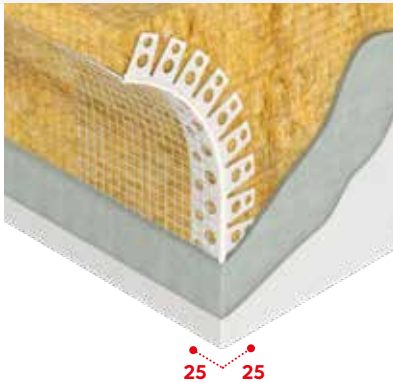- uPVC
- 1.0mm thickness
- 145 g/m² glass fibre mesh
- White



- uPVC corner bead with mesh reinforces and protects arch corners and curves in ETICS/EIFS/EWI systems, formed by insulation boards.
- Perforated wings on the bead ensure true corners with precise and neat edges.
- Glass fibre mesh to provide superior keying with the finishing coat and avoid cracking.

| Lenix V23F-A | | Length -m- | Product Code |  Pcs / Ctn |  Pack / Pallet |
|--------------|---------|------------|--------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| 1096 | 10x10cm | 2.5 | 1096 | 50 | 42 |



For
Downloads

Other lengths between 2.5m and 3.0m available on request. ■

General Information

Quality and Guarantee

- **Lenix** guarantees, within general business terms, the proper material quality and the careful manufacture of the profiles.
- No responsibility or liability is accepted for errors or information that is found to be misleading. Suggestions, descriptions and application advises are only for information and **Lenix** accepts no liability in respect thereof.
- Because the composition and the chemical and physical properties of the plasters applied are out of our control, no guarantee can be accepted for the resistance of the profiles against corrosion. The compatibility of the plaster with the profiles must be ensured.
- Varying factors in the application of plaster make it necessary to adapt to the individual working conditions from case to case. This is the responsibility of the buyer. The term of guarantee for plaster profiles is six months, in compliance with the legal regulations on sales contracts, and begins on the date of delivery.
- Practical tests are the safest way to avoid possible mistakes, for which no guarantee can be given. Corrosion can only occur if the plasters are under permanent influence of humidity or if they dry too slowly. Make sure the plaster dries quickly by airing well.
- Storage and application instructions must always be observed and followed.

| Type of Corrosion | Appearance | Cause |
|----------------------|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| General corrosion | Brown | Steel with no protective coating exposed to the air. |
| Pitting corrosion | Brown/white | Effect of corrosion stimulators (e.g. chlorides) on metals, including stainless steel. |
| Contact corrosion | Brown/white | Contact between two different metals causing the less noble one to corrode. |
| White rust | White | Corrosion of aluminium. |
| Rust film | Orange/brown | Incipient surface corrosion in a thin layer. Often caused by moisture during storage or use. |
| Crevice corrosion | Brown | Caused by crevices in the metal surface. |
| Interlayer corrosion | Detachment of surface layer | Corrosion in the contact and surface layer, adhesion zone between metal surface and surface layer. Caused by corrosive behaviour of surface layer. |

NOTES



Lenix

Building Finishing Beads

Gebze Plastikçiler OSB
Atatürk Bulvarı 11. Cad. No:9
41400 Gebze, Kocaeli | Türkiye
T: +90 262 502 16 60

www.isikgroup.com
www.lenix.com