



## Technical Data Sheet



Document No: TDS.A4201-93

Revision No: 00

Page : 1 of 1

# A4201 Stop Bead L

<b>Product Range</b>	Dry Lining
<b>Applications</b>	Gypsum Plaster
<b>Product Type</b>	Stop Bead L Smooth Surface
<b>Plaster Thickness</b>	1 mm
<b>Plasterboard Thickness</b>	12,5 mm
<b>Material</b>	Aluminium Natural
<b>Material Thickness</b>	0,40 mm
<b>Wings /Length</b>	13x23 mm
<b>Standards</b>	EN 14353
<b>Reaction to Fire</b>	Class A1
<b>DOP Reference</b>	DOP.A4201
<b>Length Options</b>	240, 250, 270, 300 cm

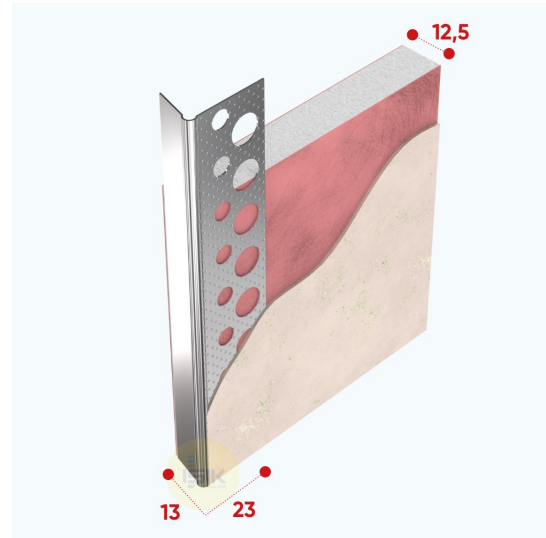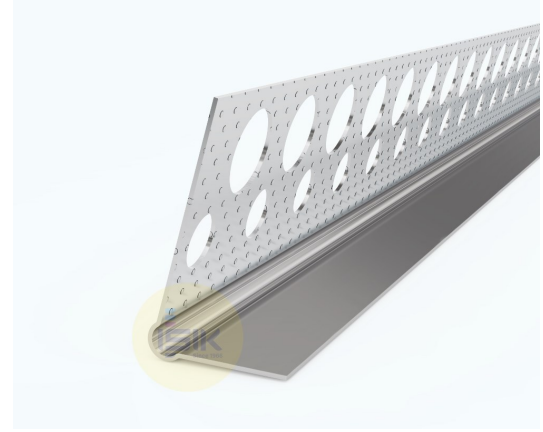

<b>Art Nr.</b>	<b>Packaging</b>
A42019302	200 pcs/ cts



### Remarks:

This technical data sheet replaces all previous versions. IŞIK reserves the right to modify products without prior notice. please rely on the application assembly and storage guidelines.

**IŞIK**

Perde Rayları

San. ve Tic. A.Ş.

Gebze Plastikçiler OSB

11. Cadde No: 9

Gebze / KOCAELİ

Tel: +90 262 502 16 60

Fax: +90 262 502 16 61

[isikgroup@isikgroup.com](mailto:isikgroup@isikgroup.com)